

**(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)**

**(19) World Intellectual Property Organization  
International Bureau**



**(43) International Publication Date**  
**13 November 2003 (13.11.2003)**

**(10) International Publication Number**  
**WO 03/092513 A1**

**(51) International Patent Classification<sup>7</sup>: A61B 17/16**

**(74) Agents: GROSFILLIER, Philippe et al.; Bugnion S.A.,  
Case Postale 375, CH-1211 Genève 12 (CH).**

**(21) International Application Number:** PCT/IB03/01725

**(81) Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**(22) International Filing Date:** 28 April 2003 (28.04.2003)

**(25) Filing Language:** English

**(26) Publication Language:** English

<b>(30) Priority Data:</b>		
60/376,479	30 April 2002 (30.04.2002)	US
60/384,186	30 May 2002 (30.05.2002)	US
60/459,594	2 April 2003 (02.04.2003)	US

**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GO, GW, ML, MR, NE, SN, TD, TG).

**(71) Applicant** (for all designated States except US): **PRECIMED S.A.** [CH/CH]; L'Echelette 7, CH-2534 Orvin (CH).

**(72) Inventors; and**

(75) **Inventors/Applicants (for US only):** **LECHOT, André** [CH/CH]; Sous L'Eau-Belle 24, CH-2534 Orvin (CH). **DAVIES, Hugh** [GB/CH]; Chemin des Rochettes 1, CH-2523 Lignieres (CH). **WHITE, Michel, Patrick** [US/US]; 1213 Indian Trail Drive, Downingtown, PA 19345 (US).


**Published:**

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*[Continued on next page]*

**(54) Title:** REAMER SPINDLE FOR MINIMALLY INVASIVE JOINT SURGERY

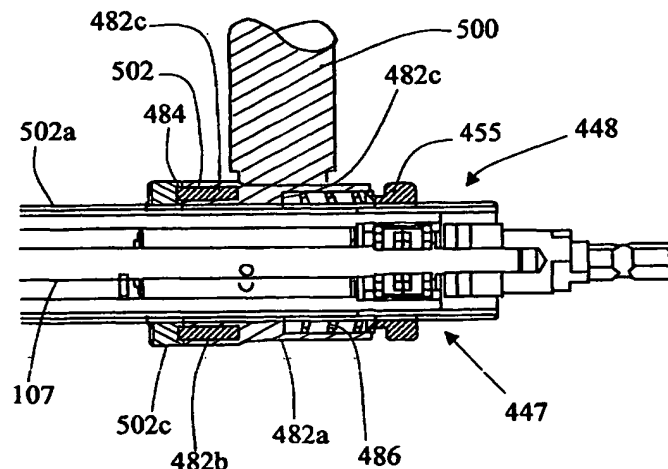

**(57) Abstract:** An adjustable reamer spindle is provided to aid the surgeon in controlling the instrument. The reamer spindle is easily disassembled for cleaning. The spindle has a repositionable handle, a locking ring, and an elastic device. The elastic device biases against a handle locking mechanism that locks the repositionable handle at angular positions about an axis of the spindle. The elastic device further biases a locking ring into a locked position. The locking ring aids in holding the reamer spindle together. Removal of the locking ring against an elastic bias of the elastic means unfastens an end of the assembly in order to facilitate disassembly and/or cleaning. Adjustment of the position of the handle about the spindle enables the palm/grip of each hand to be changed in order to provide maximum control in different orientations. The adjustment is desirable in order to accommodate operating on the left or right side of the patient, standing behind or in-front of the patient, or the use of a different surgical approach. Further, adjustment is important to accommodate the differing needs of surgeons who are naturally left or right handed.

**WO 03/092513 A1**